

Edge Gateway 500 Series

Version:
v1.0.4

Date:
04.11.2025



Contents

1	Copyright	2
2	Regulatory Compliances	3
2.1	Complies with the following EU directives	3
2.2	References of standards applied	4
2.3	FCC PART 15 VERIFICATION STATEMENT	5
2.4	ICES-003 ISSUE 7 VERIFICATION STATEMENT	5
3	Safety Instructions	6
4	Product Specifications	7
4.1	Technical Details	8
4.2	Dimensions	9
5	Power Supply	10
6	Power Consumption	11
7	Interfaces and Connections	12
7.1	EG 503L	13
7.2	EG 503W	15
8	Radio Modules (only relevant with optional LTE/WiFi Modules)	16
8.1	Radio Frequencies	16

1 Copyright

Copyright and Trademarks, 2025 Publishing. All Rights Reserved

This manual, software and firmware described in it are copyrighted by their respective owners and protected under the laws of the Universal Copyright Convention. You may not reproduce, transmit, transcribe, store in a retrieval system, or translate into any language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, biological, molecular, manual, or otherwise, any part of this publication without the express written permission of the publisher.

All products and trade names described within are mentioned for identification purpose only. No affiliation with or endorsement of the manufacturer is made or implied. Product names and brands appearing in this manual are registered trademarks of their respective companies. The information published herein has been checked for accuracy as of publishing time. No representation or warranties regarding the fitness of this document for any use are made or implied by the publisher.

We reserve the right to revise this document or make changes in the specifications of the product described therein at any time without notice and without obligation to notify any person of such revision or change.

2 Regulatory Compliances

2.1 Complies with the following EU directives

Radio Equipment Directive (2014/53/EU) only applies to devices containing radio module EM05-G.

No	Short Name
2014/35/EU	Low Voltage Directive (LVD)
2014/53/EU	Radio Equipment Directive (RED)
2014/30/EU	Electromagnetic Compatibility (EMC)
2011/65/EU	Restriction of the use of certain hazardous substances in electrical and electronic equipment Directive (RoHS2)
2015/863/EU	Amendment to Annex II in Directive 2011/65/EU regards the list of restricted substances (RoHS3)

2.2 References of standards applied

Standard	Reference	Issue
EN 18031-1	Common security requirements for radio equipment - Part 1: Internet connected radio equipment	2024
EN 55032	Electromagnetic compatibility of multimedia equipment - Emission Requirements	2015+AC:2016
EN 55035	Electromagnetic compatibility of multimedia equipment - Immunity requirements	2017
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions	2014
EN 61000-3-3	Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems	2013
EN 61000-4-2	Electromagnetic compatibility (EMC). Testing and measurement techniques. Electrostatic discharge immunity test	2009
EN 61000-4-3	Electromagnetic compatibility (EMC) - Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test	2006+A1:2008+A2:2010
EN 61000-4-4	Electromagnetic compatibility (EMC) - Part 4-4 : Testing and measurement techniques - Electrical fast transient/burst immunity test	2012
EN 61000-4-5	Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test	2014+A1:2017
EN 61000-4-6	Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields	2014+AC:2015
EN 61000-4-8	Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test	2010
EN IEC 61000-4-11	Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests	2004+A1:2017
EN 301 489-1 (module)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility	V2.2.3
EN 301 489-52 (module)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 52: Specific conditions for Cellular Communication User Equipment (UE) radio and ancillary equipment; Harmonised Standard for ElectroMagnetic Compatibility	V1.2.1
Draft EN 301 489-19 (module)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services - Part 19: Specific conditions for Receive Only Mobile Earth Stations (ROMES) operating in the 1,5 GHz band providing data communications and GNSS receivers operating in the RNSS band (ROGNSS) providing positioning, navigation and timing data	V2.2.0
ETSI EN 301 908-1 (module)	IMT cellular networks; Harmonised Standard for access to radio spectrum; Part 1: Introduction and common requirements Release 15	V15.1.1

2.3 FCC PART 15 VERIFICATION STATEMENT

WARNING

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

May Contain transmitter module:

- XMR2021EM05G

2.4 ICES-003 ISSUE 7 VERIFICATION STATEMENT

CAN ICES3(A)/NMB3(A)

This device complies with CAN ICES-003 Issue 7 Class A. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Cet appareil est conforme à la norme CAN ICES-003 Issue 7 Class A. Le fonctionnement est soumis aux deux conditions suivantes : (1) cet appareil ne doit pas causer d'interférences nuisibles et (2) cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant opération indésirable.

May Contain transmitter module:

- 10224A-2021EM05G

3 Safety Instructions

Please read these instructions carefully and retain them for future reference.

1. Disconnect this equipment from the power outlet before cleaning. Do not use liquid or sprayed detergent for cleaning. Use a moist cloth or sheet.
2. Keep this equipment away from humidity.
3. Ensure the power cord is positioned to prevent tripping hazards and do not place anything on top of it.
4. Pay attention to all cautions and warnings on the equipment.
5. If the equipment is not used for an extended period, disconnect it from the main power to avoid damage from transient over-voltage.
6. **Prolonged usage with less than 12V may damage the PSU or destroy the mainboard.**
7. Never pour any liquid into openings as this could cause fire or electrical shock.
8. Have the equipment checked by service personnel if:
 - The power cord or plug is damaged.
 - Liquid has penetrated the equipment.
 - The equipment has been exposed to moisture in a condensation environment.
 - The equipment does not function properly, or you cannot get it to work by following the user manual.
 - The equipment has been dropped and damaged.
9. Do not leave this equipment in an unconditioned environment, with storage temperatures below -20 degrees or above 60 degrees Celsius for extended periods, as this may damage the equipment.
10. Unplug the power cord when performing any service or adding optional kits.
11. Lithium Battery Caution:
 - Risk of explosion if the battery is replaced incorrectly. Replace only with the original or an equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.
 - Do not remove the cover, and ensure no user-serviceable components are inside. Take the unit to a service center for service and repair.


4 Product Specifications

4.1 Technical Details

Feature	Specification	EG503 (4GB RAM)	EG503 (Standard)
Processor	CPU	Intel® Atom™ x5-E3930	Intel® Atom™ x5-E3940
Memory	RAM	4 GB LP-DDR3	8 GB LP-DDR3
Storage	Free Storage	100 GB	100 GB
Security	TPM	TPM 2.0 with TrEE 1.1	TPM 2.0 with TrEE 1.1
I/O Ports	HDMI	-	1
	Gigabit Ethernet	3x RJ45	3x RJ45
	USB 3.0	1	3
	USB 2.0	-	1
	Serial Ports	-	1 RS232 (RS485 optional) (TX/RX only)
	DIO	-	1 DI, 12-24V 1 DO, 12-24V, max. 2 A, output voltage defined by DC input
Connectivity	LTE (EG503L only)	4G	4G
Expansion	SIM Slot	1 push-push Type Nano-SIM Slot	1 push-push Type Nano-SIM Slot
Additional	Watchdog Timer	System Reset, Programmable via Software from 1 to 255 Seconds	System Reset, Programmable via Software from 1 to 255 Seconds
Environmental	Operating Temperature	-20° to 60° C	-20° to 60° C
	Storage Temperature	-20° to 80° C	-20° to 80° C
	Humidity	5% to 95% non-condensing	5% to 95% non-condensing
	IP rating	IP20	IP20
Power	Supply	12 - 24 V DC (+/-10 % tolerance)	12 - 24 V DC (+/-10 % tolerance)
	Connector	Terminal block	Terminal block
Mounting	Options	DIN-Rail	DIN-Rail
Operating System	Compatibility	Welotec egOS	Welotec egOS
Physical Build	Material/Color	Steel / Aluminum	Steel / Aluminum
	Dimensions	130 x 90 x 30 mm	130 x 90 x 30 mm
	Weight	500 g	500 g

4.2 Dimensions

4.2.1 System Drawings

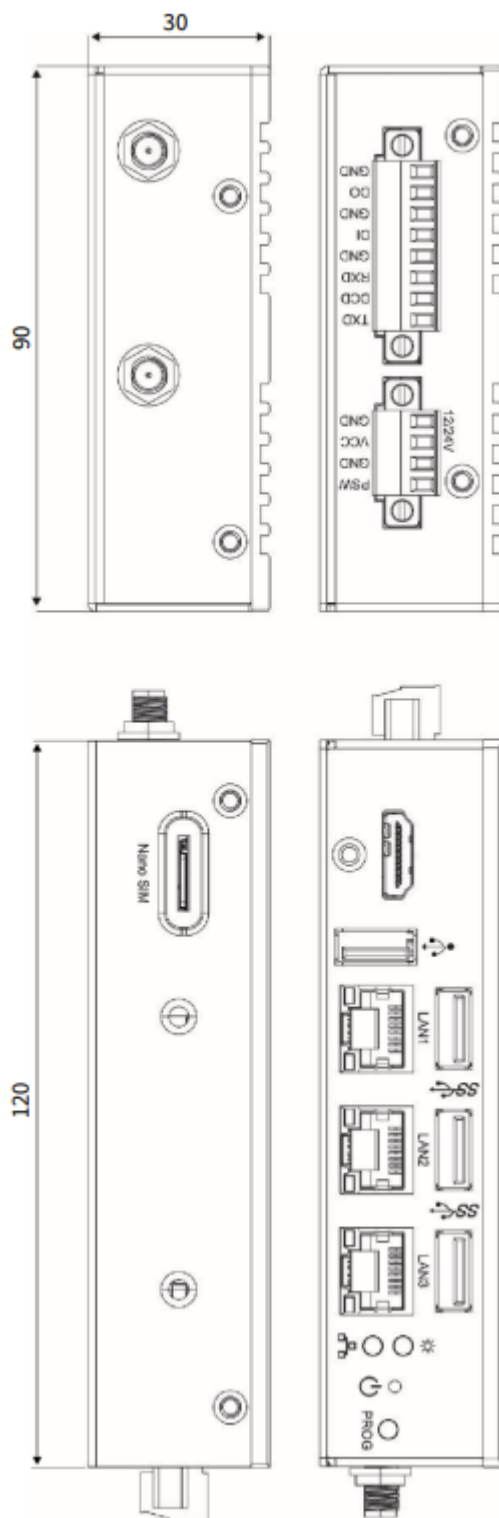

5 Power Supply



⚠ Please ensure no external voltage is applied to PSW! This could cause damage.

Use the terminal block to connect the Edge Gateway to a 12-24V DC power source.

Pin	Description
Pin 0 – PSW	External power switch
Pin 1 – GND	Ground
Pin 2 – VCC	V+ 12-24V
Pin 3 – GND	Ground

6 Power Consumption

Item	Specification
CPU	Intel Atom® x5-E3940 Processor
RAM	LP-DDR3 8GB
Operating System	Windows 10 IoT 2021 LTSC
Test Program	3DMark06
Storage	128GB M.2 NVMe




Note: The following results are for reference only.

Voltage	Power Off	Startup Max	Startup Stable	Stable	EG503W Max	Burn-in	EG503L Max	Burn-in	Shut-down
12V	0.14A	0.95A	0.62A		1.10A		1.50A		0.82A
24V	0.09A	0.50A	0.32A		0.57A		0.77A		0.42A

Note: Power consumption varies based on configuration and software usage.


7 Interfaces and Connections

7.1 EG 503L

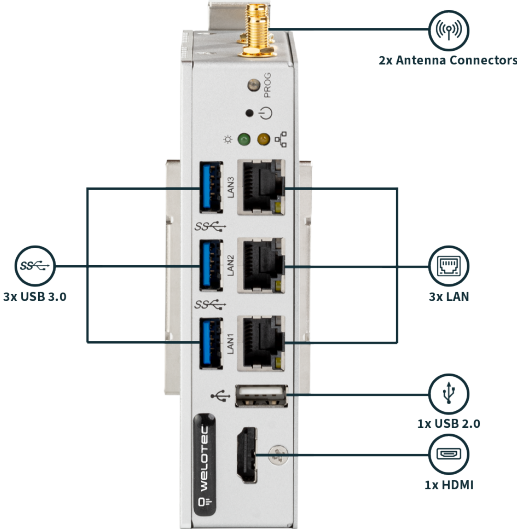
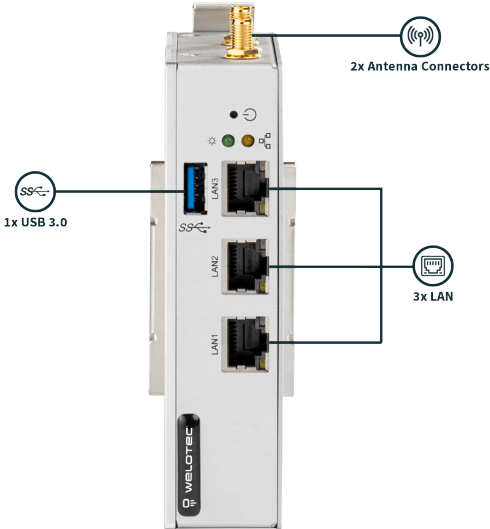
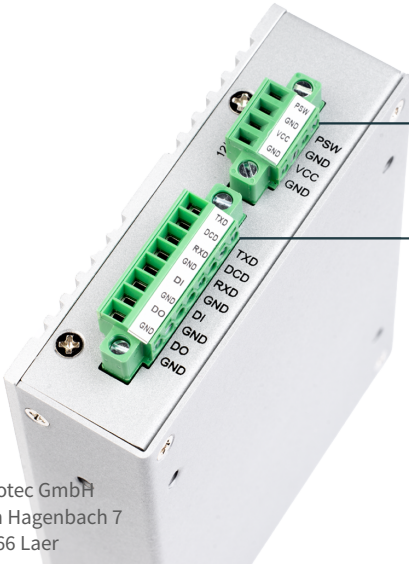
EG 503L 8GB	EG 503L 4GB
 2x Antenna Connectors 3x USB 3.0 3x LAN 1x USB 2.0 1x HDMI	 2x Antenna Connectors 1x USB 3.0 3x LAN
 2x Antenna Connectors Diversity Main	 2x Antenna Connectors Diversity Main
 1x Power connector 1x I/O	 1x Power connector

7.2 EG 503W

EG 503W 8GB

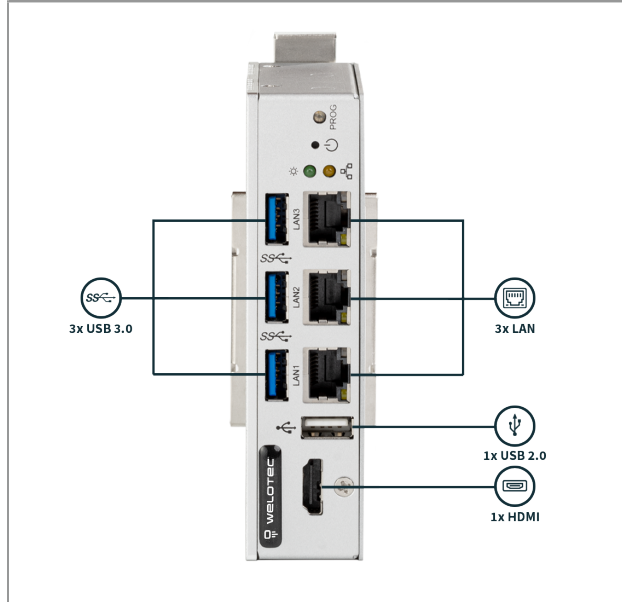

EG 503W 4GB

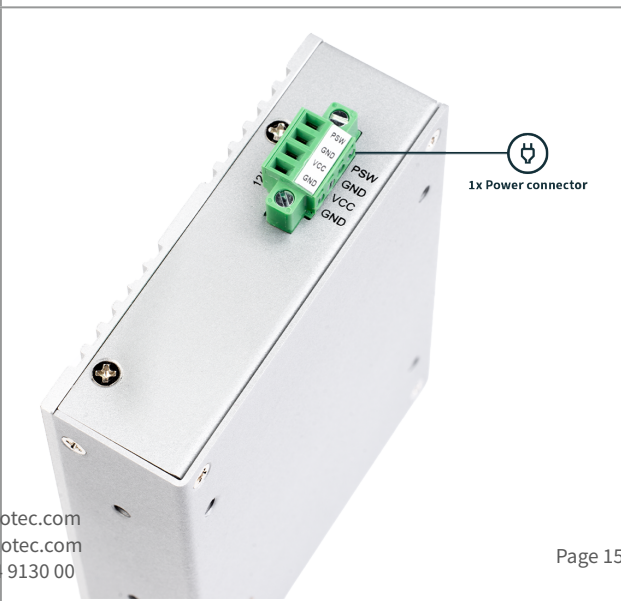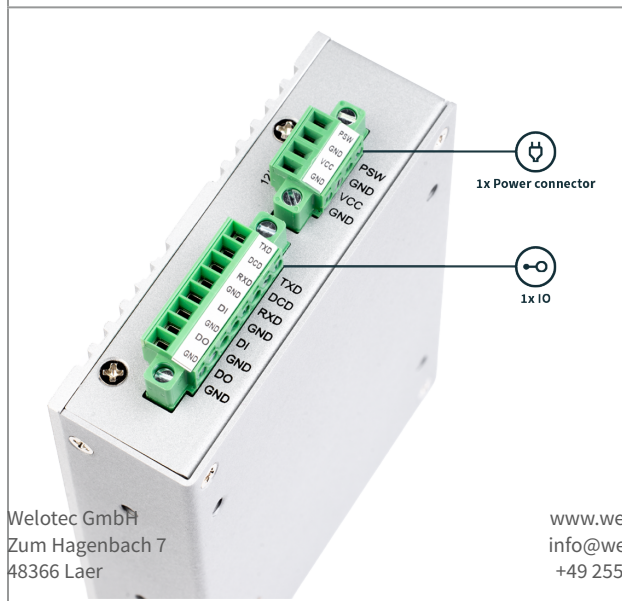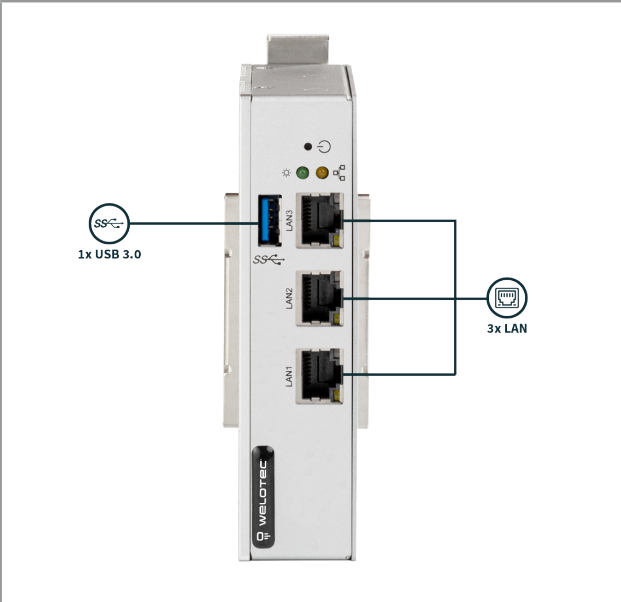

8 Radio Modules (only relevant with optional LTE/WiFi Modules)

The EG503L may contain the following RF Module:

- Quectel EM05-G

LTE:

Quectel EM05-G	Supported Bands
LTE	FDD B1/ B2/ B3/ B4/ B5/ B7/B8/ B12/B13/B14/ B18/ B19/B20/ B25/ B26/ B28/B66/B71TDD B38/ B39/ B40/ B41
WCDMA	B1/ B2/ B4/ B5/ B6/ B8/ B19

8.1 Radio Frequencies

8.1.1 4G LTE Europe

Band	Frequency Range Down	Frequency Range Up	Max Transmission Power
Band 1	2110 MHz - 2170 MHz	1920 MHz - 1980 MHz	199 mW
Band 3	1805 MHz - 1880 MHz	1710 MHz - 1785 MHz	199 mW
Band 7	2620 MHz - 2690 MHz	2500 MHz - 2570 MHz	199 mW
Band 8	925 MHz - 960 MHz	880 MHz - 915 MHz	199 mW
Band 20	791 MHz - 821 MHz	832 MHz - 862 MHz	199 mW
Band 28	758 MHz - 803 MHz	703 MHz - 748 MHz	199 mW
Band 38	2570 MHz - 2620 MHz	2570 MHz - 2620 MHz	199 mW
Band 41	2496 MHz - 2690 MHz	2496 MHz - 2690 MHz	199 mW

8.1.2 3G UMTS Europe

Band	Frequency Range Down	Frequency Range Up	Max Transmission Power
Band 1	2110 MHz - 2170 MHz	1920 MHz - 1980 MHz	251 mW
Band 8	925 MHz - 960 MHz	880 MHz - 915 MHz	251 mW

Notes

- **Down:** Refers to the downlink frequency range.
- **Up:** Refers to the uplink frequency range.
- **Max Transmission Power:** Maximum power at which the device transmits.